

## CELLULAR PICO REPEATER



### Cellular Pico Repeater for enhancing coverage In demanding environments

- Use ultra high linearity amplifier
- SAW filter used providing very sharp out band roll off
- Low spurious, optional remote control and monitoring
- Oscillation cancellation technology


# Turnkey coverage solutions

The Eyecom range of repeater products are class-leading in their design, functionality and extreme reliability and with our broad range of available repeaters we are able to tailor a solution that bestfits any customer's need.

The Eyecom High Power Repeater is the ideal choice

where maximum coverage distance or area is required. They are available as either band selective or channel selective and with the option of either on-site configuration of remotely via the Eyecom NMS (Network Management Software).

Typical applications include: Sector coverage extension in car park and confined area coverage in urban area.

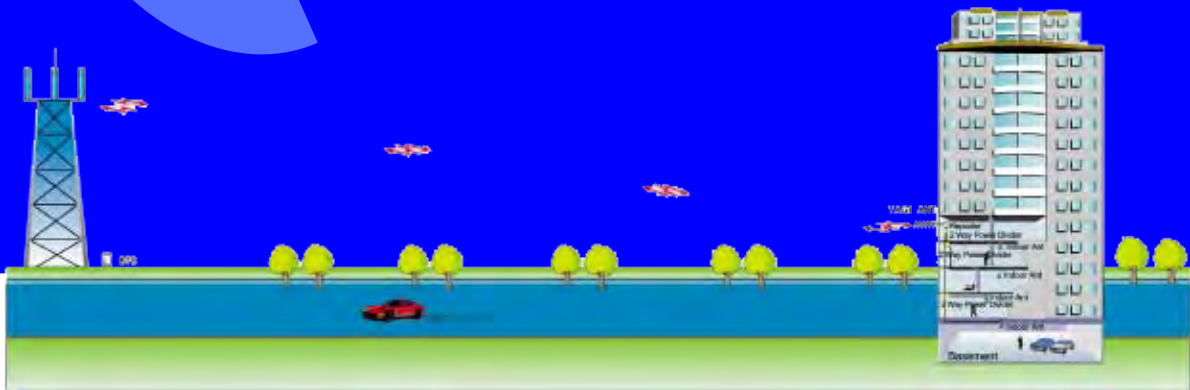

## Eyecom Cellular Specification

Frequency Bands     Adjust able in range  
CDMA, GSM900/1800, WCDMA

For other frequency band  
Variations, contact your dealer  
Of the manufacturer

Maximum Output Power     0 dBm - 20 dBm

Gain     45 - 80 dB

Power Supply     220 VAC or Customized

RF Connector     N-F or Customized

Optical connectors     NA

Compliant to     EN301502  
EN301908-11  
EN301908-1  
EN 300609-4  
3GPP

For solution specific requirements, please contact our sales!

*Eyecom company policy is one of continuing improvement, therefore we reserve the right to change this specification without notice.*

### RESELLER:

### MANUFACTURER:



Gaopu Road No.1021-1023,  
National Software Industry Park,  
Guangzhou, China.  
Phone +86 20 37020080  
Fax +86 20 37020081  
www.eyecom-telecom.com